




Tiled. Grouted. Finished. Embrace with the Flow...

MURA-TILE SURROUND FOR BATHS & SHOWERS Specification

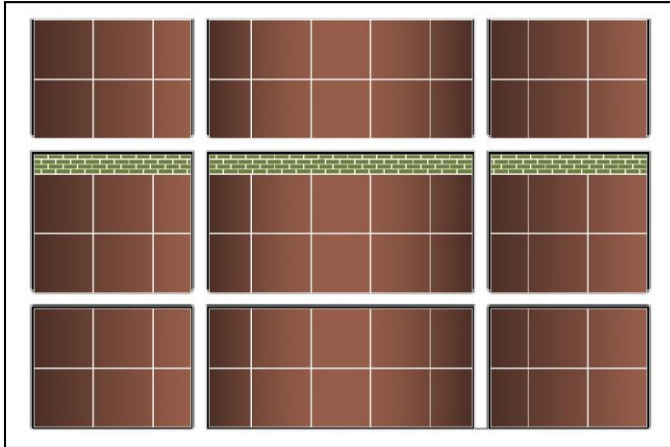

Generalized overview of a typical surround with tile, listello and grout. (Actual tile and listello layout, color and size varies per design.)

Construction & Features

- Nine interlocking panels, completely tiled & grouted, ready to install.
- 1" flange along horizontal and vertical seams of panel-to-panel meeting edges to facilitate watertight installation.
- Secure, invisible, watertight connection between the flanges and framing studs.
- Specialized Mura-Lock connection structures along panel-to-panel meeting edges to secure panels into correct placement and alignment.
- Front and back surface of panels treated with antifungal additive.
- Tile placement at panel-to-panel meeting edges creates an interlocking and consistent finish.
- Applications:
 - Complete shower with Mura-Tile tray.
 - Tub surround.
- Weight: 40 - 60 lbs. (nominal, varies with dimensions).


MAJOR FINISH MATERIAL COMPONENTS¹

MAJOR FINISH MATERIAL COMPONENTS ¹	
Tile	
Wall Tile ²	TYPICAL: Marazzi / American Olean / Ragno / Daltile Glazed porcelain, color-body porcelain, glazed ceramic
Listello ³	TYPICAL: Marazzi / American Olean / Ragno / Daltile / Five Elements Porcelain, ceramic, pebble, natural stone, metal and/or glass
Edge Trim ⁴	TYPICAL: Genotek Round edge trim - Anodized aluminum, color to complement tile
Grout ⁵	TYPICAL: HB Fuller TEC Power Grout - Polymer modified, high performance grout
Caulking ⁴	TYPICAL: HB Fuller AccuColor 100% Silicon Sealant - Color to match grout
1. See website or product literature for a detailed listing of tile, grout, trim and caulking options. 2. Porcelain and ceramic tile is in accordance with ANSI A137.1 3. Decorative accent strip – can be horizontal or vertical, depending on design. 4. Provided for installation of product. 5. Grout exceeds ANSI A118.7.	

Mura-Tile Standard Models comply with the following standards and codes:

- IAPMO PS 106-2014
- International Residential Code (2015, 2012 and 2009)
- International Plumbing Code (2015, 2012 and 2009)
- Uniform Plumbing Code (2012 and 2009)

ICC-ES PMG Listing #: 1266

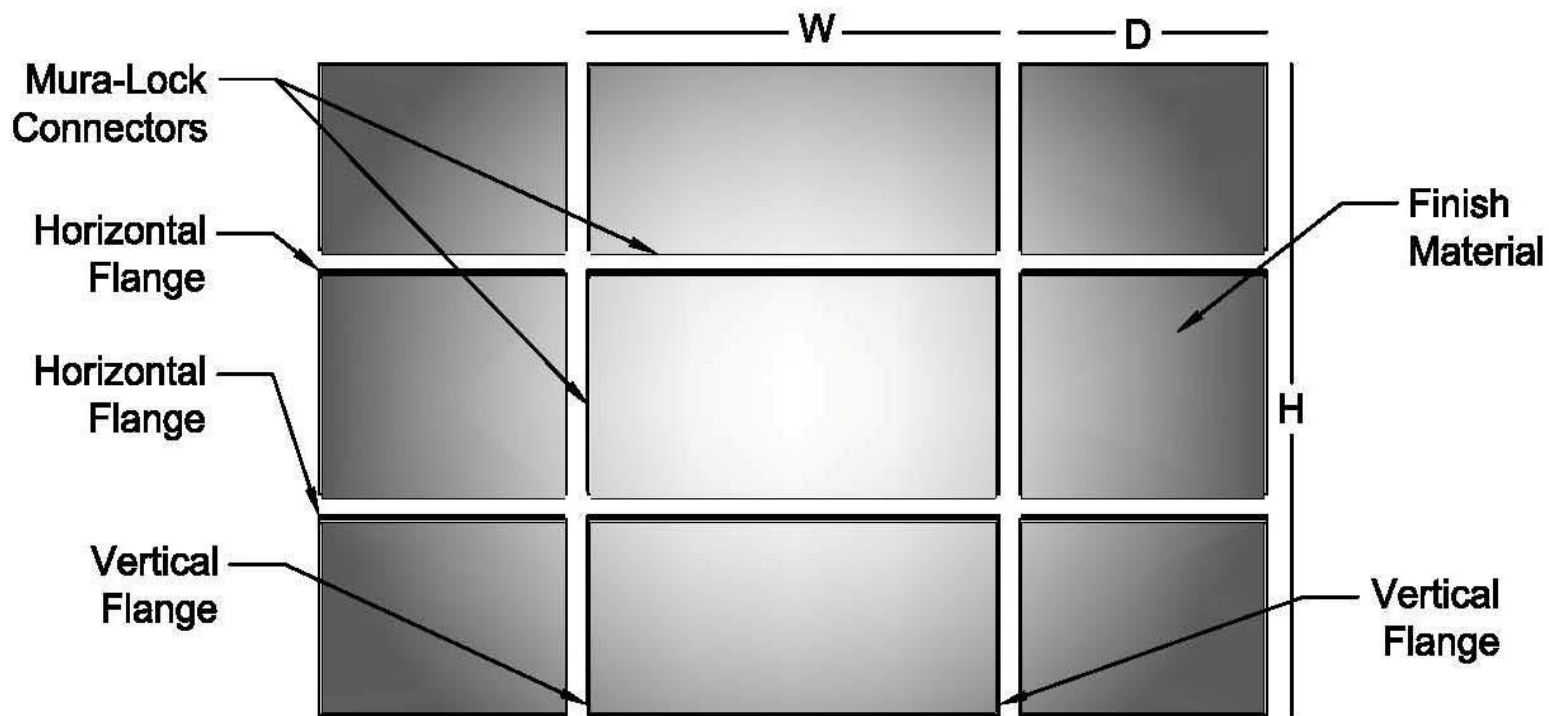

Available Standard Sizes

		Width (W), in			
		36	42	48	60
Depth (D), in	30				H = 60*, 72*, 84
	32			H = 60, 72, 84	H = 60*, 72*, 84
	34			H = 60, 72, 84	H = 60, 72, 84
	36	H = 60, 72, 84		H = 60, 72, 84	H = 60, 72, 84
	42		H = 60, 72, 84		

* Standard bath tub surrounds are only available in these dimensions.
 NOTE: Heights (H) are nominal and measured from base of surround; actual height dependent on specific design and tile size; refer to Mura-Tile Surround Standard Design Overviews.

Finish Material Detail

Width	# of columns (of tile) dependent on surround dimensions, tile size & design. Always: full tile on center; tiles cut to fit at right & left edge.
Depth	# of columns (of tile) dependent on surround dimensions, tile size & design. Always: full tile at front; tile cut to fit at back.
Height	# of rows (of tile) dependent on surround dimensions, tile size & design. Always: full tile at bottom; full tile at top.
Tile	Typical options: 12" x 12", 13" x 13" & 12" x 24"
Listello	Typical listello: 5" – 8" thick (width/height). Vertical listello placement: center of back wall. Horizontal listello placement: three or four rows up (dependent on surround height, tile size & design).
Edge Trim	Height equals height of surround. Thickness equals tile thickness. Installed in situ after panels have been installed.